


# 5' Lean-To Assembly Instructions



NOMINAL SIZE	A (mm)	B (mm)
5lt X 6		2012
5lt x 8	1619	2632
5lt x 10		3252
5lt x 12		3872

NOMINAL SIZE	A (mm)	B (mm)
6ft extension		1860
8ft extension		2480
10ft extension	-	3100
12ft extension		3720

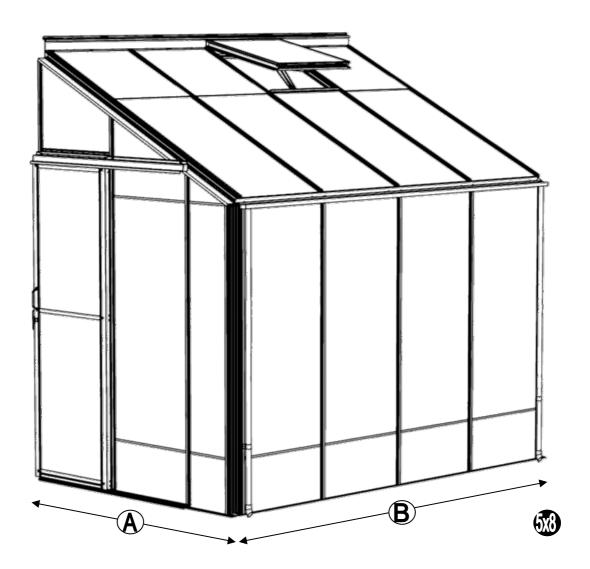

Thank you for purchasing your new Robinsons greenhouse. We recommend you familiarise yourself with the instructions and read all safety information before you commence assembly. This instruction manual is also available online at www.robinsonsgreenhouses.co.uk in our technical help section should you need to reprint it. Should you require any additional advice you can always call us on 01782 385409.

These instructions are divided into sections highlighted by a white number/letter on a black background at the bottom corner of most pages (see opposite page for details); part lists, B-base, P-preparation, 1-side, 2-front gable, 3-rear, 4-joining the three sides together, 5-roof, 6-wall attachment, 7-vent, 8door, 9-glazing, 10-vent attachment, 11-door attachment, 12-anchoring down, 13-optional louvre, 14-optional shelf, 15-optional staging, 16-finishing touches. If you need to contact us for assistance please refer to the relevant section/s. If your building is longer than 12', i.e. has an extension then please also refer the separate extension manual.

# **Safety Warning**

- Glass and aluminium can potentially cause injury. Please ensure you wear protective goggles, gloves, headgear and suitable footwear when assembling and glazing the building.
- Please remember that glass is fragile and should be handled with extreme care. Always clear up and dispose of any breakages immediately.
- Do not assemble the greenhouse in high winds.
- For safety reasons and ease of assembly, we recommend that this greenhouse is assembled by a minimum of two people.
- Please clear all lying snow from the greenhouse roof as it can cause the roof to buckle or collapse.

### Site Preparation

- When selecting a site for your greenhouse, it is vital that you choose as flat and level an area as possible.
- A concrete or slabbed base will provide the most solid foundation for your greenhouse.
- IMPORTANT: Do not fix your building down until the building is fully assembled, including glazing.
- Avoid placing your greenhouse under trees or in other vulnerable locations.
- To minimise the risk of wind damage, try to select as sheltered a site as possible, e.g. beside a hedgerow or garden fence.

## **Additional Considerations**

- Please bear in mind that assembling your greenhouse can be time consuming. You may need to spread the construction over two or more days. We recommend that you avoid leaving the building partially glazed. If you ever have to leave your greenhouse half assembled and not anchored down, weigh it down with slabs or bags of sand to stop the wind moving it.
- You will find it helpful to prepare a large, clean and clear area in which to work in. A garage floor or flat lawn area is ideal.
- If you have arranged for someone to install your greenhouse for you, please check that all components are included. Some parts are numbered and can be identified by a stamped or hand written number (without the 'D'). Alternatively, the components can be identified by their distinctive profiles, lengths and quantities detailed in the parts list (see next page). KEY **KEY DESCRIPTION**

SYMBOL

**EXTERNAL VIEW** 

- Anchoring down your greenhouse should be the final stage of construction (including glazing).
- Once installed your greenhouse requires little maintenance, but to maintain the smooth running of your door(s) WD40 or similar can be applied to the door wheels and lower door guides.

### Guarantee

Your new Robinsons greenhouse is guaranteed for 10 years against faulty manufacture of the framework. This does not include glazing, moving parts, accidental damage or wind damage.



SECTION No	TITLE	ASSEMBLY SYNOPSIS: IMPORTANT INFORMATION / CONSIDERATIONS
	PARTS LIST	Most components should have a 'D' code punched into their metal surface. Identify and separate all like for like components prior to assembly. The 'parts list' also separates parts into the various sections 1 - 12 shown below. Parts can also be identified by their profile pictures and stated lengths etc
В	BASE	Base dimensions and recommendations. Ensure that your base is level as this will make assembly of the building, especially the glazing of the roof much more straight forward.
Р	PREPARATION	Tools required. <u>IMPORTANT</u> : Use WD40 or similar in the glazing bar channels and insert the black glazing rubber prior to frame assembly.
1	SIDE	Take the side glazing bars 'D066' with the rubber inserted and the diagonal braces 'D103', use 10mm bolts to join them to the gutter and 15mm bolts to the cills (note how the head of the bolt slides into each glazing bar during construction).
2	FRONT	Again ensuring that the gable framework is rubbered-up follow the diagrams to assemble each end of the building. Make sure that you have inserted the extra bolts utilised in sections
3	REAR	4, 5 and 11. On the roof and side corner bars not every rubber channel will require rubber unless it is to be utilised in a partition (see separate manual and section P).
4	JOINING THE THREE SIDES	Take the side (1) and both gables (2 & 3) and join them together on your base. It is a good idea to tie some ladders to the side to support them if you do not have anyone to hold them for you.
5	ROOF	Attach the ridge and then the rubbered-up roof bars ensuring that they are fully butted up to the ridge and down onto the gutter. Some tubular braces are supplied to add extra strength, they can be fitted now or later with crop head bolts.
6	WALL ATTACHMENT	The main body of the frame is complete it can be attached to the wall. Make sure that the wall bars are vertical and the ridge is horizontal then drill and screw the building to the wall. Do not attach the base to the ground until section (12) as your building may not be square.
7a	VENT	Once the vent is glazed add silicone to the vent sides and top. Stand the vent/s on their hinge (vent top) and then leave the silicone to set.
7b	VENT SLAM	The slam bar 'D079' can be moved up and down between the roof glazing bars so that it can be butted down onto the pane of glass beneath, the autovent is attached to it later on (10).
8	DOOR/S	Construct the door using the diagrams and then leave to one side ready for attachment in section (11).
9	GLAZING	Layout the bar cappings and covers around the building like a sundial checking that all is present and correct. You can also place the roof cappings in the gutters so they are closer to hand. The glass in the sides has to bevel on the black separator strip which is on top of the 305mm high glass base panels. This bevelling action allows the glass to tuck underneath the gutter canopy. Use the capping and the self tapping screws to then hold the glass in place. The covers then enclose the screw heads giving a neat finish. A top tip is to not attach the door post capping (D814/D836) until you have fitted the door runner and threshold (11) to give you more room to manoeuvre.
10	VENT ATTACHMENT	Take the assembled vent and slide the vent hinge 'D866' into the end of the ridge allowing the vent the pivot open and closed. Vent stops go either side of the vent to stop any lateral movement (so insert stop / vent / stop). Attachment of the Bayliss XL autovents.
11	DOOR ATTACHMENT	Use the bolts inserted in section (2) to attach the upper door track. The lower door runner 'D860' and ramp threshold 'D087' push down and lock together.
12	ANCHORING DOWN	Now that the greenhouse is finished and the door and vent/s are operating without interference then you need to anchor the building down using 2" rawl plugs and screws. Use a 7mm masonry bit in a hammer drill to create the holes.
13	OPTIONAL LOUVRE	They attach to the building during the glazing process (9) like a piece of glass with a black separator above and below them.
14	OPTIONAL SHELVING	Robinsons integral cantilever staging and shelving attaches to the inside of the greenhouse frame using either square head bolts (insert four into each side glazing bar 'D066' during construction of the sides (1)) or rectangular 'crop head' bolts which can be fitted retrospectively (both sets of bolts accompany the shelving/staging). This system allows the height of either the staging or the shelf to be set at an operator specific height. Commonly the staging brack-
15	OPTIONAL STAGING	ets are set 900mm from the cills though you can alter this to suit the end user/s. The aluminium shelf / staging slats come in two lengths; (4'):1240mm 'D2002' and (6'):1860mm 'D2003'. These slats can combine to create any length of staging required, i.e. 4'+6' = 10' etc
16	FINISHING TOUCHES	Now that the main body of the structure is complete you can add; downpipe fittings, eave bungs.

Section <b>Ref</b>	Part No.	Section	Size (mm)	5lt 6	5lt 8	5lt 10	5lt 12
	D043		1894	1			
	D021		2514		1		
	D022	<del></del>	3134			1	
	D023		3754				1
	D042		1897	1			
	D014	7-	2517		1		
	D015		3137			1	
	D016		3757				1
	D103		1787		2	2	
	D066		1676	2	3	4	5
	RUBBER	Q	1000 (1m)	7	11	14	17
	D174		N/A	2	2	4	4

	D039L	1		1
	D039R		1625	1
	D048	<b>₹</b>	1676	2
2 <del>4</del> 3	D055		2422	2
	D056		2126	2
	D057		1830	2
	D110		1585	1
	D105		1918	2
	D149		N/A	2

,	6	10	

	2	D854L		1744	1
)	7	D854R			1
	당 중	RUBBER	Q	1000 (1m)	36
	3	D174		N/A	8

	D045	<u>_</u>	1897	1			
	D007	ſ	2517		1		
5	D008	<b>&gt;</b>	3137			1	
	D009	$\wedge$	3757				1
	D065		1744	2	3	4	5
	RUBBER	Q	1000 (1m)	7	11	14	18

	D866	•	639	1	1	2	2
	D863L		613	1	1	2	2
7	D863R		613	1	1	2	2
	D862		593	1	1	2	2
	D079 PLUS FLUFF	H TÊ	590	1	1	2	2
	D114	00	N/A	2	2	4	4
	D220 PLUS FS6060 SCREW	00	N/A	2	2	4	4
	D205		N/A	2	2	4	4

Section Ref	Part No.	Section	Size (mm)	5It 6	5lt 8	5lt 10	5lt 12	
	D090 + D347 lock = D301	<u></u>	1824	1				
	D094	<u></u>	1824	4 1				
	D096 + D217 wheel = D307		611			1		
8	D095	[]	611			1		
	D097		611			1		
	D232		905			2		
	D233	1	797			2		
	P053	5	N/A			1		
	D225	0	610			1		
	D840B		4000			1		

MAIN FRAME QUANTITIES VENTS/ DOORS etc SEPERATE	SEPERATE	10mm	20	23	26	29
	DOORS etc 5	15mm	37	38	39	40
MAIN F	VENTS/	m6	57	61	65	69







	Section	Part	Section	Size	5lt	5lt	5lt	5lt	
	Ref	No.		(mm)	6	8	10	12	
		D040		1000				_	
			-		2		4	5	
	2/3	D815	-	1830	2				
	3	D818	7-	2126	1				
	2	D819		227			1		
		601	2	3	4	5			
	Ref     No.     (mm)     6     8       1     D812     1660     2     3       2/3     D815     1830     2       3     D818     2126     227       5     D870     601     2     3       5     D876     1152     2     3       2/3     D813     1675     1883     2       2     D814     1883     2422     1660     5       5     D871     516     601     1152       5     D877     1152     1754     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5       1660     4     5	4	5						
	2/3	D813	J-t <sub>4</sub>	1675	2				
9	2	D814		1883	2				
	3	D824		2422		1			
	1	D834		1660		:	2		
	2	D835		516	1				
	5	D871		601	2				
	5	D877		1152		2			
		D044		4754	4			7	
							6	7	
					4		6	7	
					2				
	2/3	D827		1832	2				
	3	D829	lr 1	2128	1				
	3	D832		2424		1			
	2	D833		518			1		
	2	D836		1883		-	2	_	
	2	D846		229		1			

	D864		590	1
	D860	<b>√</b> Ę	1240	1
	D087		587	1
11	D084	للر	1270	1
	D083	]	1270	1
	D153	10 07	198_	1
	D163	6	90	2
	D154	-	N/A	1

# THE DIMENSIONS BELOW ARE THE EXACT EXTERNAL BASE DIMENSIONS FOR THE ROBINSONS RANGE.

We cannot emphasis how important it is to have a proper base for your Robinsons Greenhouse to be erected upon.


It is essential that the BASE IS FLAT, LEVEL AND SQUARE AS WELL AS BEING SUBSTANTIAL enough to take the weight of the greenhouse including its 4mm glass.


Give yourself enough room around your base to allow for fitting the glass and any on-going maintenance / cleaning. A slab base which is larger than the greenhouse is the ideal solution and is our preferred foundation.

A brick perimeter base is equally suitable providing there is a concrete foundation beneath it. We suggest using a solid brick with no frogs or holes (quality stock bricks or semi-engineering bricks).

**IMPORTANT**: Do not anchor your greenhouse down until it is fully assembled including glazing unless you are 100% sure your base is square and level. If not your glass will not fit properly.

**IMPORTANT:** If you have anything overhanging the ridge on a lean-to building then please make sure it does not interfere with the motion of the roof vents.

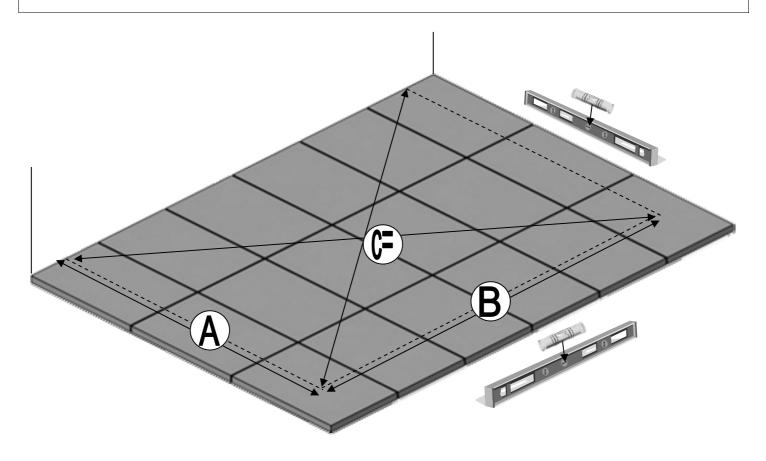

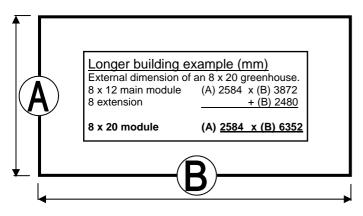






Model sizes listed are **nominal**, use 'mm' measurements.
i.e.: an 8 x 10 is the model 8'6" x 10' 8"

MODE	MODEL		B (mm) LENGTH	C (mm) DIAGONAL
	5 x 6 Lt		2012	2583
5' LEAN-TO	5 x 8 Lt	1619	2632	3090
	5 x 10 Lt		3252	3633
	5 x 12 Lt		3872	4197
	6ft ext.	-	1860	-
EXTENSIONS	8ft ext.	-	2480	
	10ft ext.	-	3100	-
	12ft ext.	-	3720	-




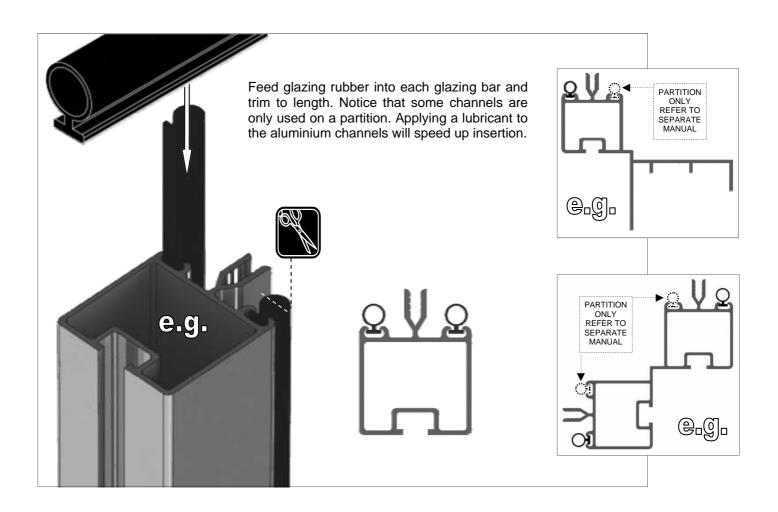

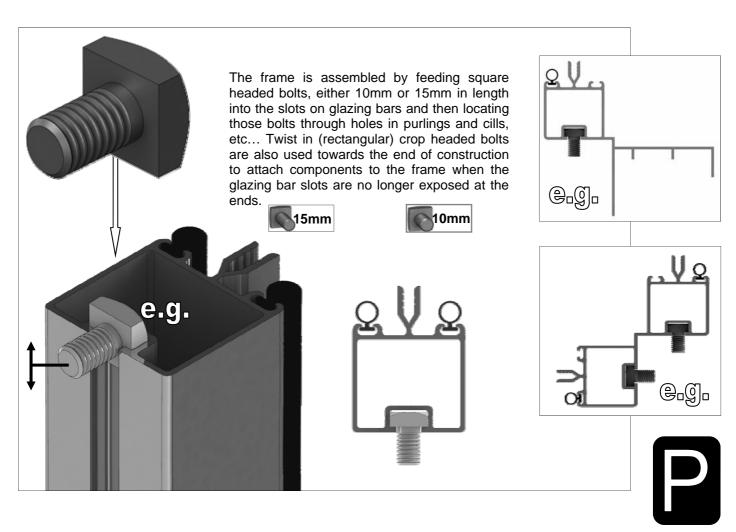


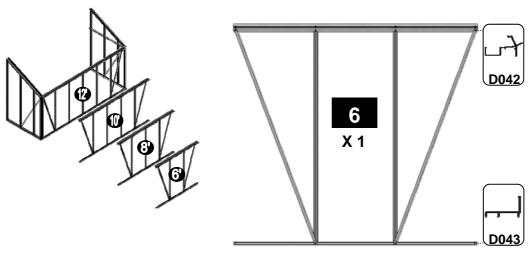


	6 X 1				
Part No	mm	Quantity			
D042	1897	1			
D043	1894	1			
D066	1676	2			
D103	1787	2			
D174	1	2			
M6- 10mm		2			
M6- 15mm	Carried States	4			
M6- NUT		6			
Rubber	1000	7			

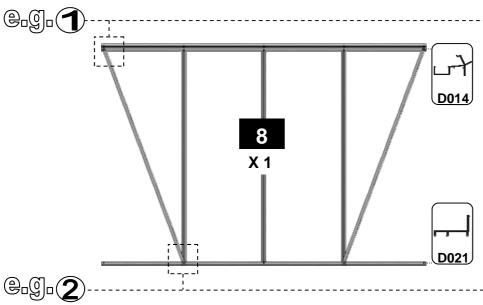


8 X 1				
Part No	mm	Quantity		
D014	2517	1		
D021	2514	1		
D066	1676	3		
D103	1787	2		
D174	•	2		
M6- 10mm	3	3		
M6- 15mm	Contract of the contract of th	5		
M6- NUT		8		
Rubber	1000	11		

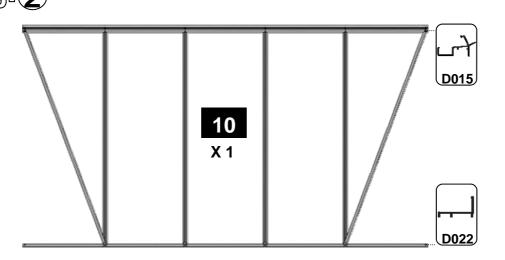



10 X 1					
Part No	mm	Quantity			
D015	3137	1			
D022	3134	1			
D066	1676	4			
D103	1787	2			
D174	4	4			
M6- 10mm	3	4			
M6- 15mm		6			
M6- NUT		10			
Rubber	1000	14			

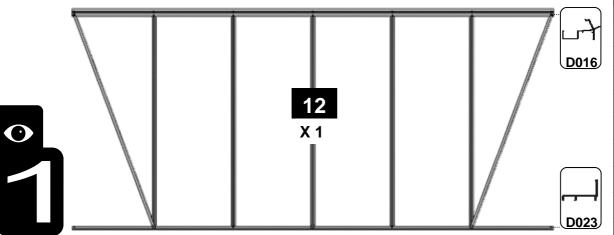



	ļ.	
	12 X 1	
Part No	mm	Quantity
D016	3757	1
D023	3754	1
D066	1676	5
D103	1787	2
D174	4	4
M6- 10mm		5
M6- 15mm		7
M6- NUT		12
Rubber	1000	17

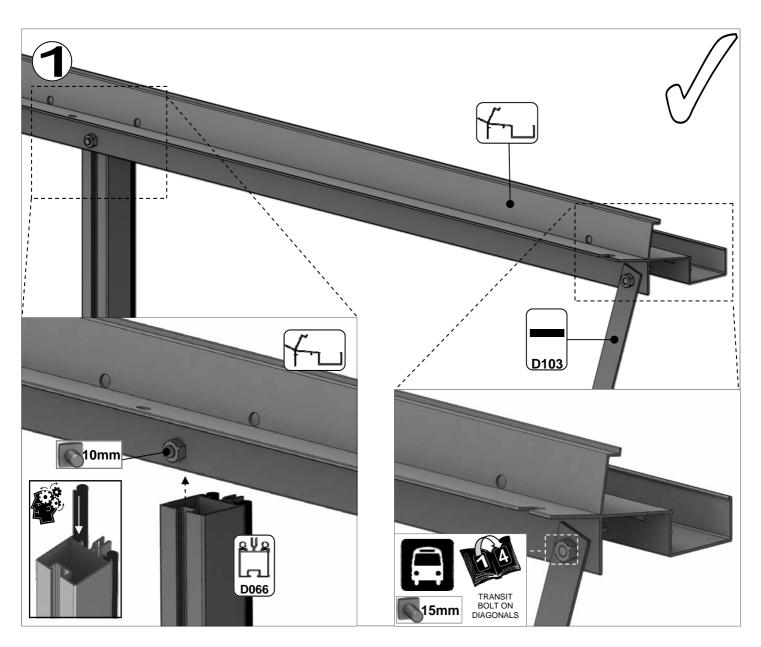


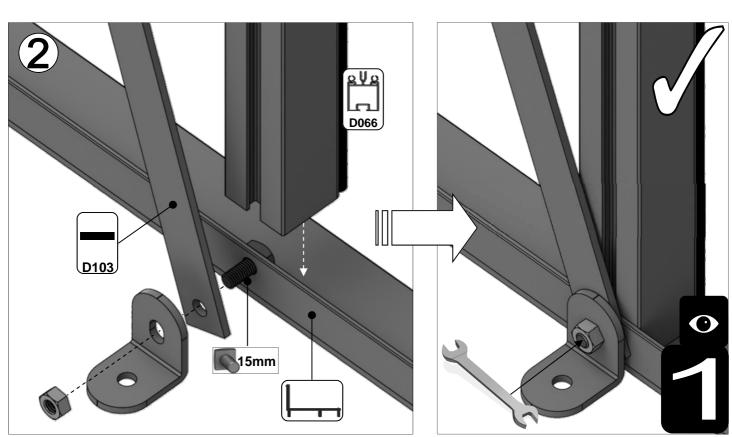


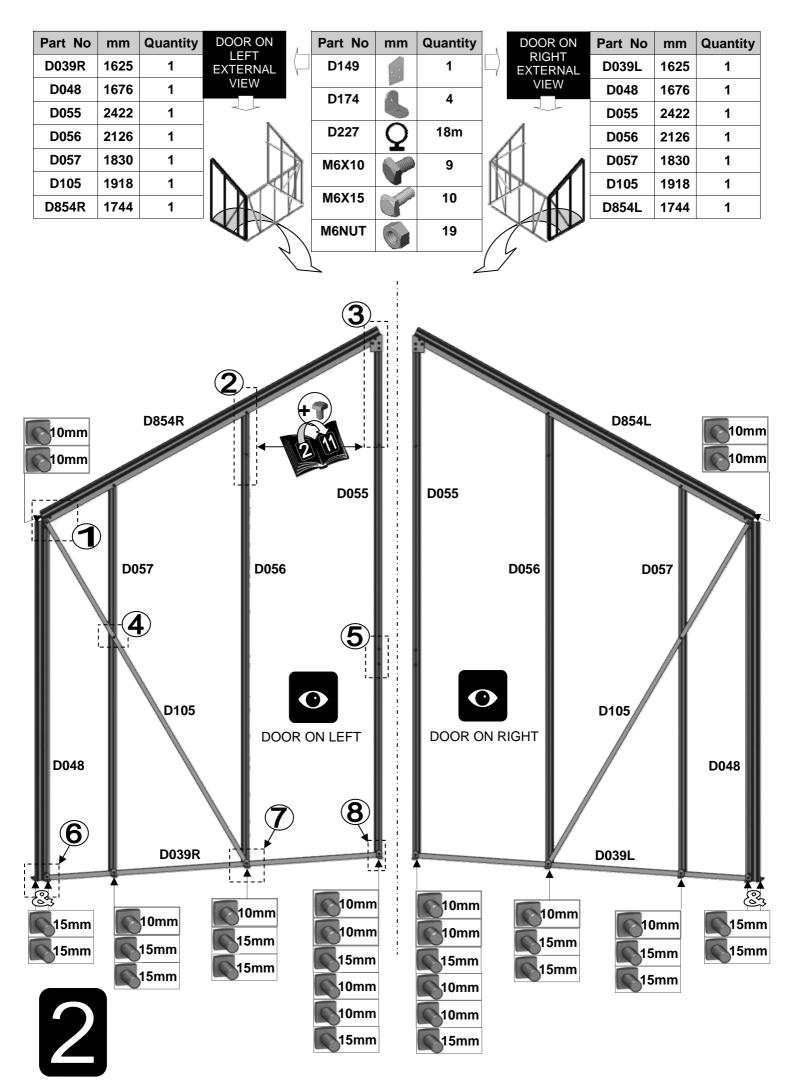


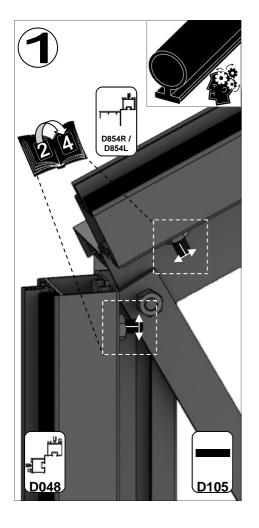


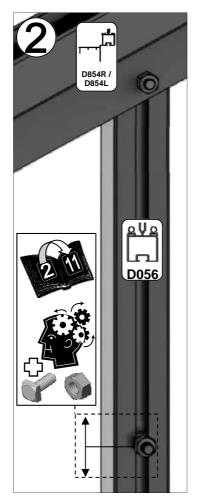


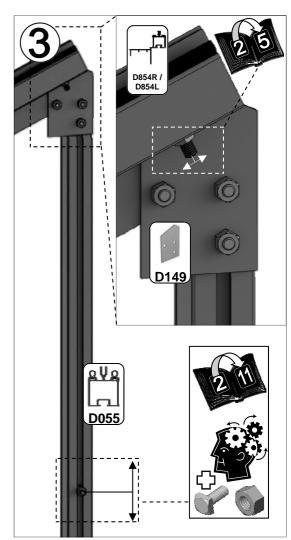

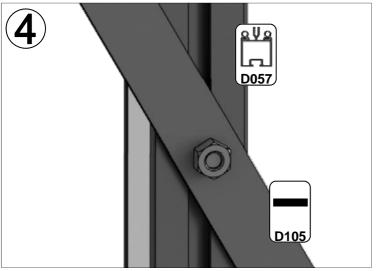


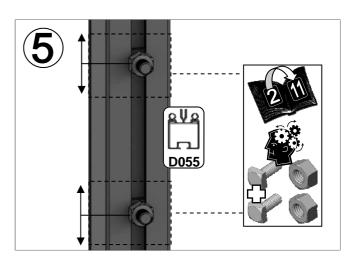











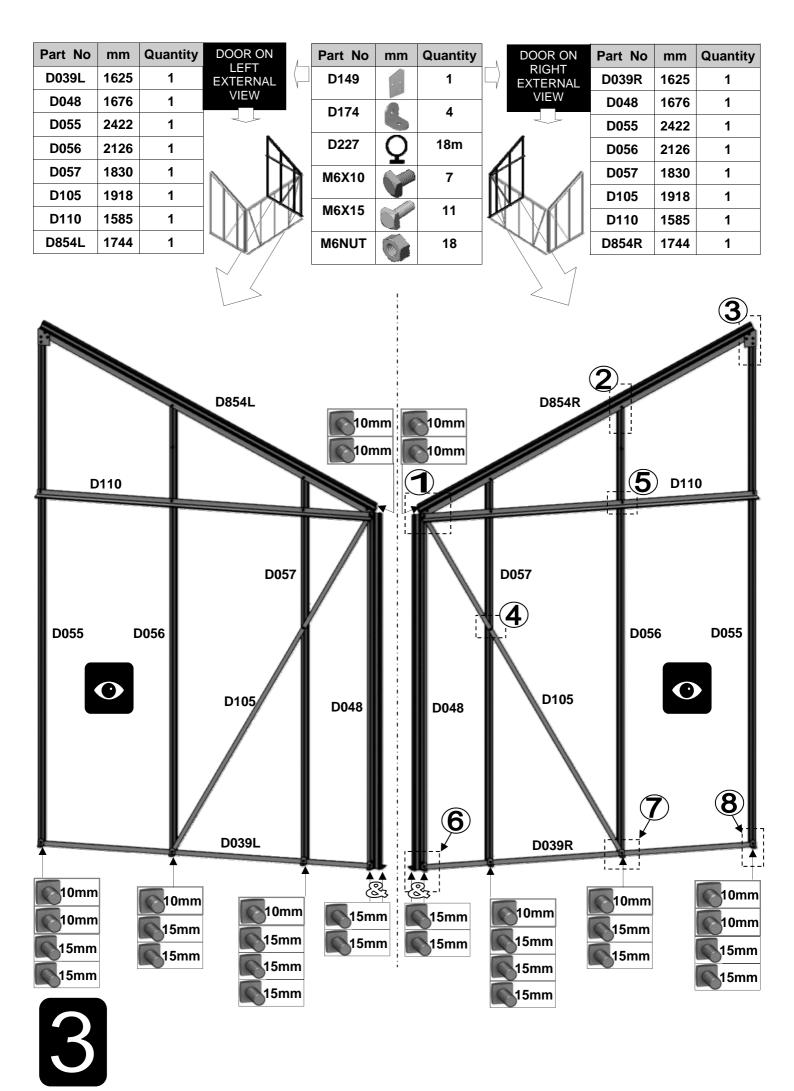


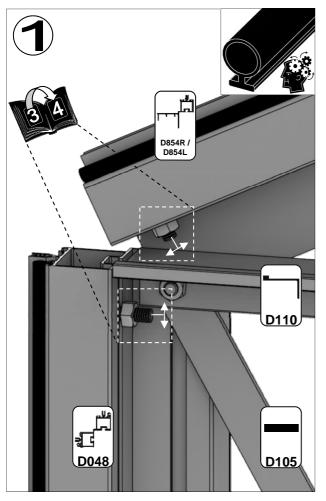





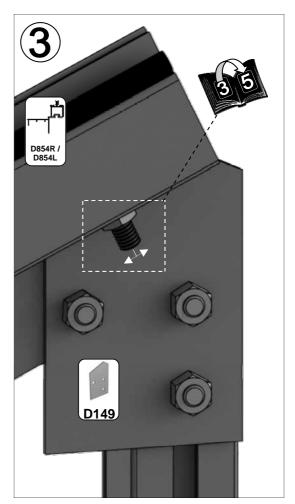

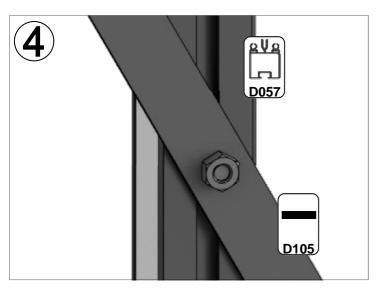


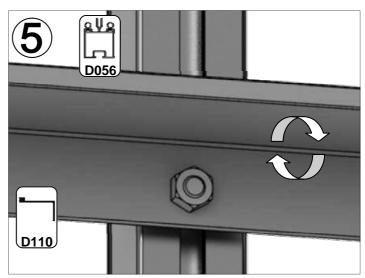











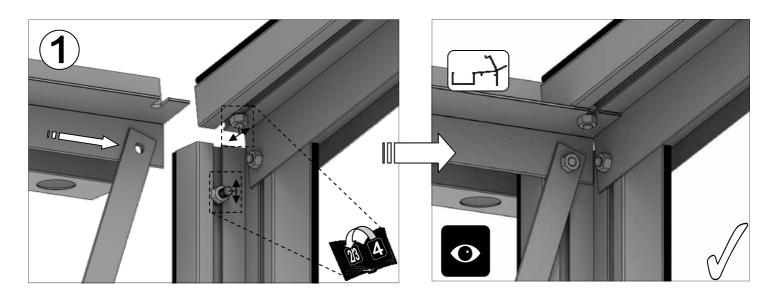

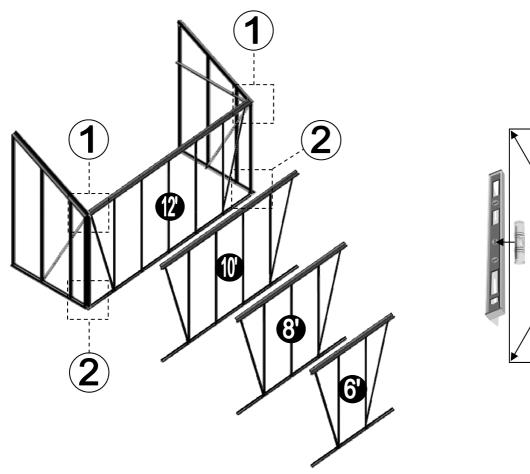



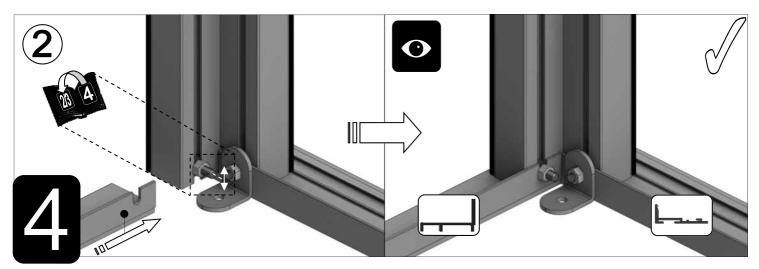






mm	Quantity
2517	1
1744	3
445	3
1000	11
	2517 1744 445


10'		8
Part No	mm	Quantity
D008	3137	1
D065	1744	4
D126	445	4
RUBBER	1000	14
		<u> </u>

12'		10
Part No	mm	Quantity
D009	3757	1
D065	1744	5
D126	445	5
RUBBER	1000	18

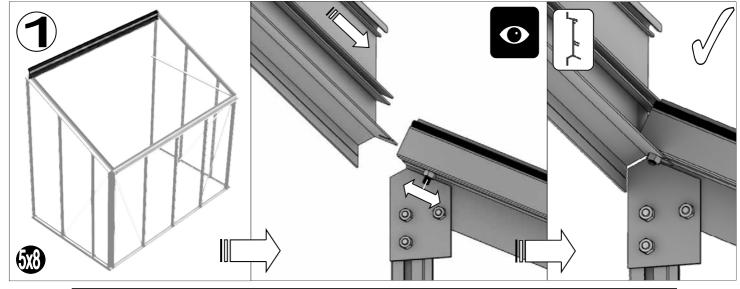


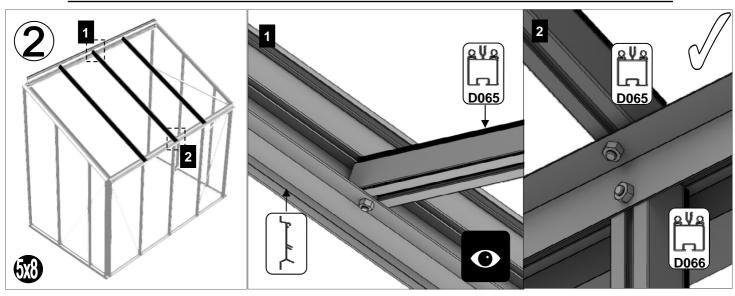

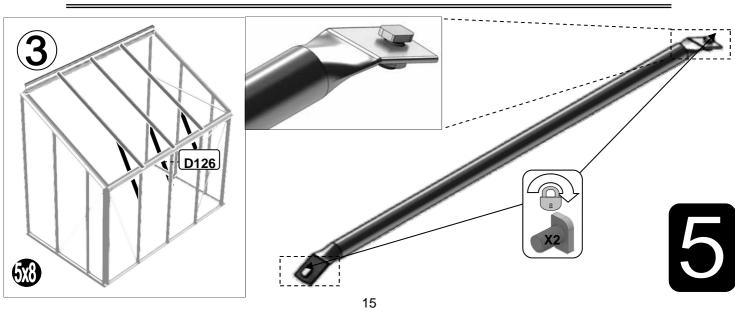

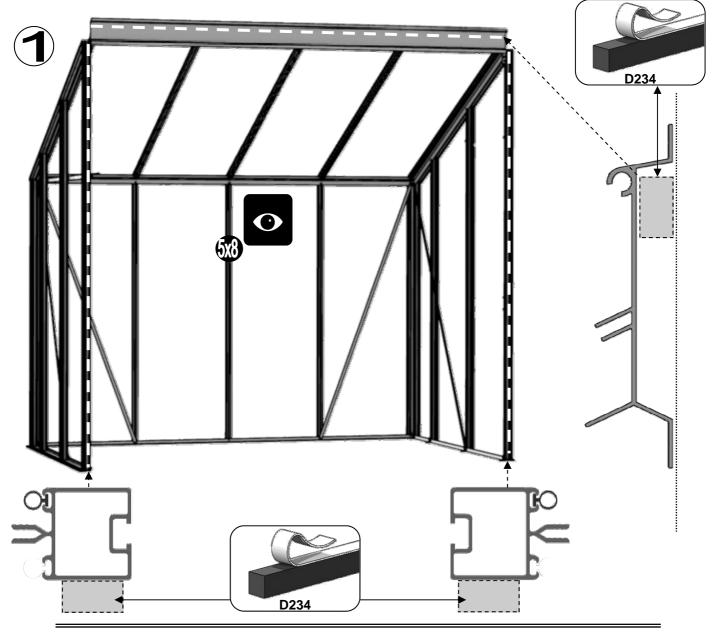




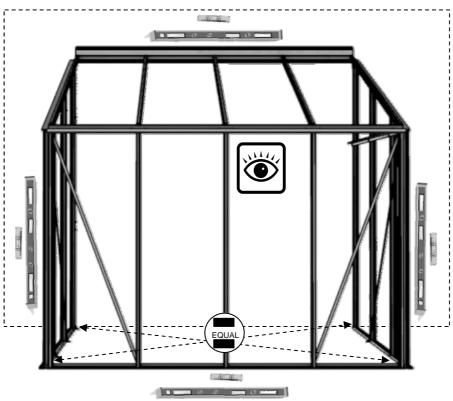


			5x6	5x8	5x10	5x12
Part No		mm		Qu	antity	
SYSCR3	X)	75	11	12	13	14
SYRAWL		50	11	12	13	14






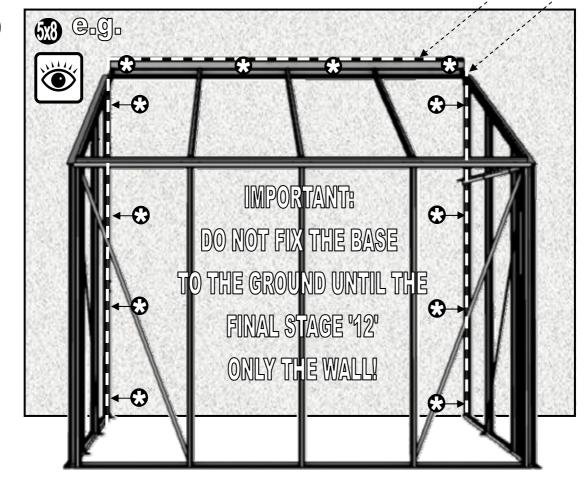

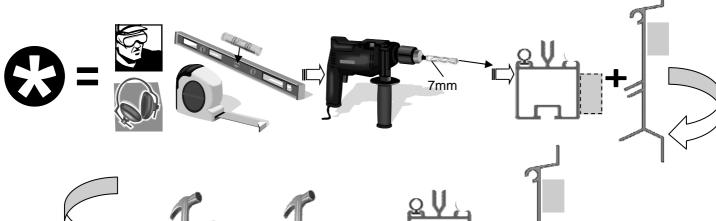




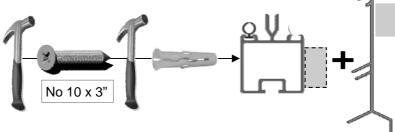

There are various methods for attaching your greenhouse frame to its wall.


- 1) Drill through the vertical wall bars with a 7mm drill/hammer drill using a 7mm masonry bit, Use 3" screws to secure the wall bars.
- 2) Drill through the vertical wall bars with a 7mm drill bit and enlarge the inner hole to 10mm. Use 2" screws to secure the wall bars hiding the screw heads inside the bars to give a neat finish.
- 3) Use L-shaped brackets and 2" screws to secure the frame to the wall similar to anchoring the green-house down (e.g. section 12).








Part No		mm	Quantity
D866	<b>~</b> _	639	1
D863L		613	1
D863R	上	613	1
D862	<u></u>	593	1


Part No		mm	Quantity
D220 PLUS FS6060 SCREW	0	N/A	2
D205	-	N/A	2
SY- BOLM6X11		10	4
SYNUTM6		M6	4
8 X 12 S/T FS6017	6	10	2
8 x 19 S/T FS6018		19	2

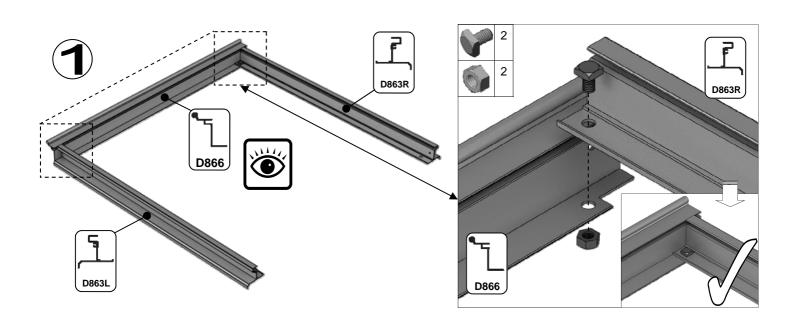

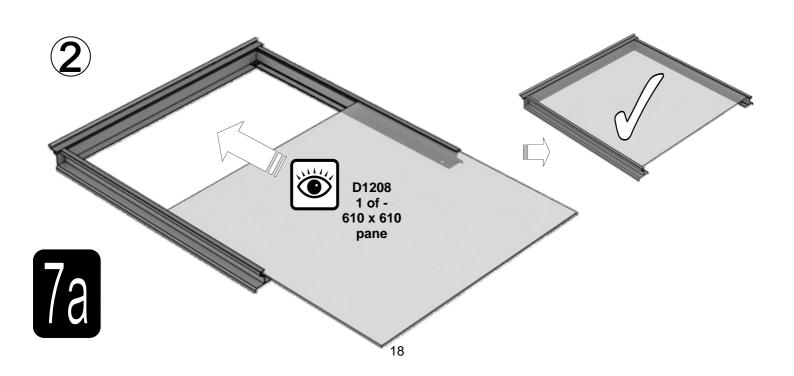

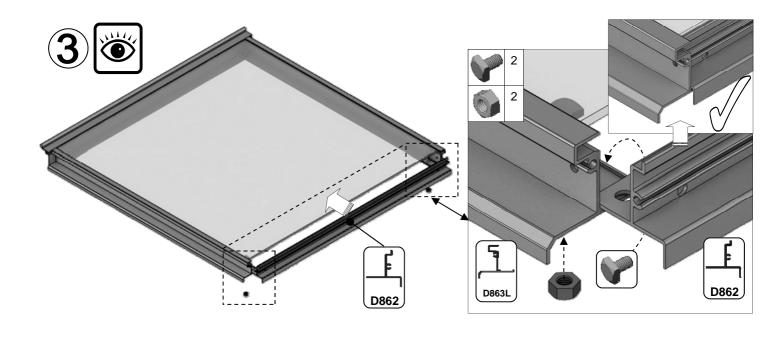

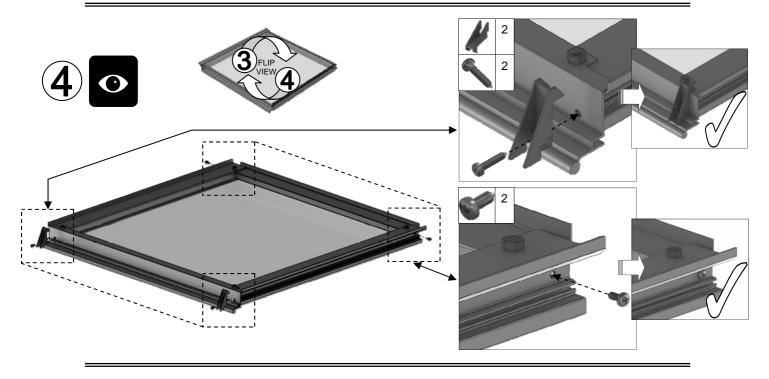


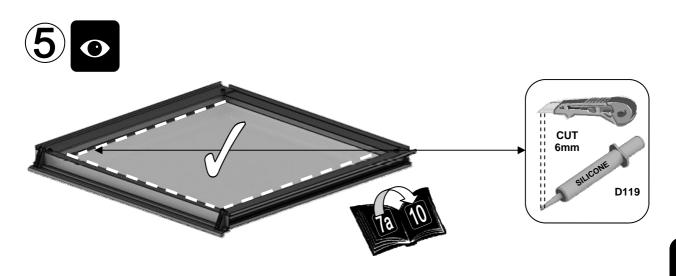





Part No		mm	Quantity
SY- BOLM6X11		10	2
SY- BOLM6X15	P	15	2
SYBOLM6 X11CROP		10	2
SYNUTM6		N/A	4

Part No		mm	Quantity
D079 PLUS FLUFF	яŢ	590	1
D114	00	N/A	2

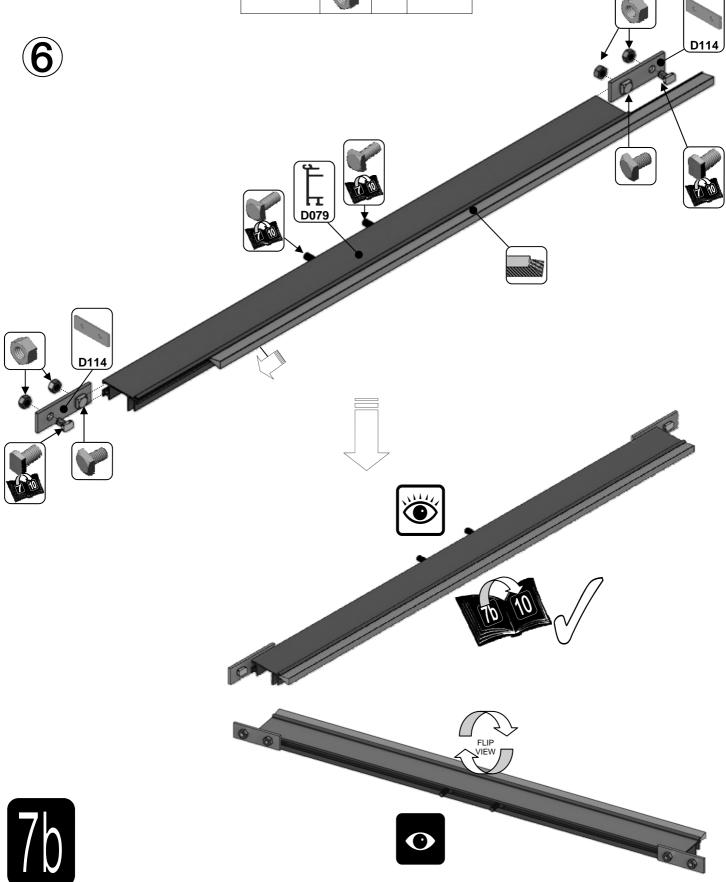

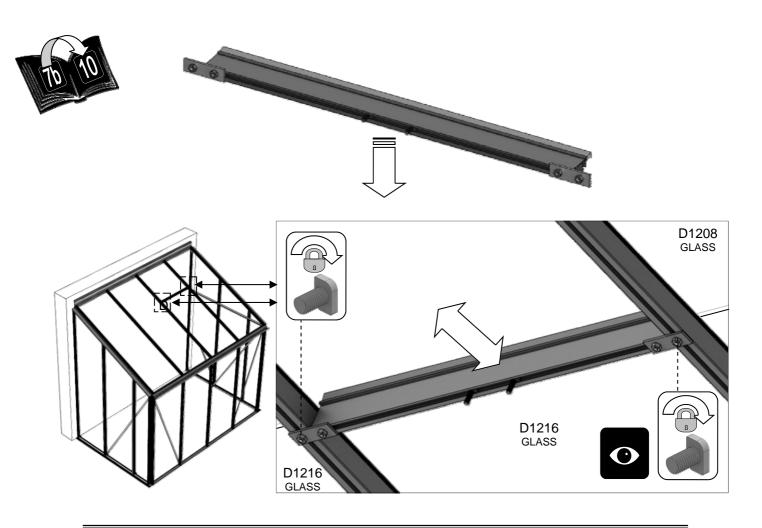


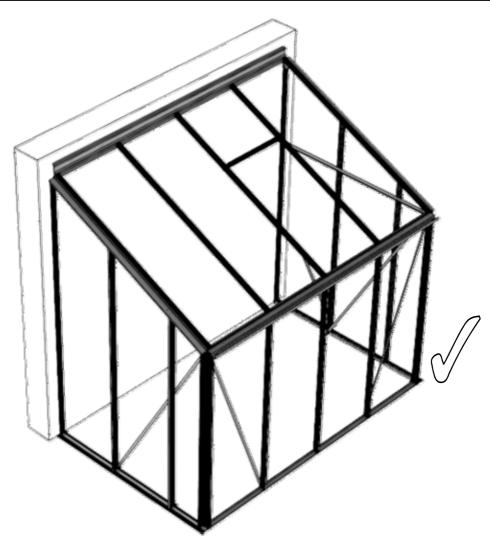






Part No		mm	Q
D090 + D347 lock = D301	<u>L</u> .	1824	1
D094		1824	1
D096 + D217 wheel =		611	1
D095	Ę	611	1
D097		611	1


Part No		mm	Q
D232		905	2
D233	I	797	2
P053		N/A	1
D225	8	610	1
D840B		4000	1
D263 PACK		N/A	7
		N/A	7
D260 PACK	Cam	N/A	12

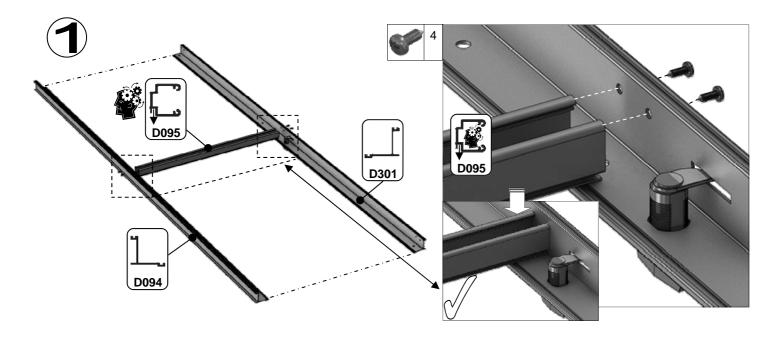


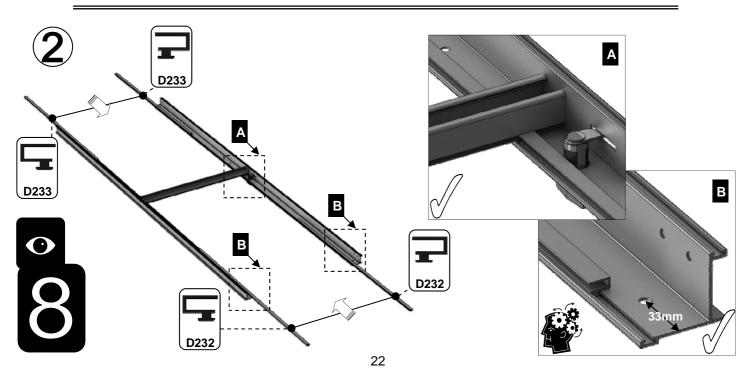


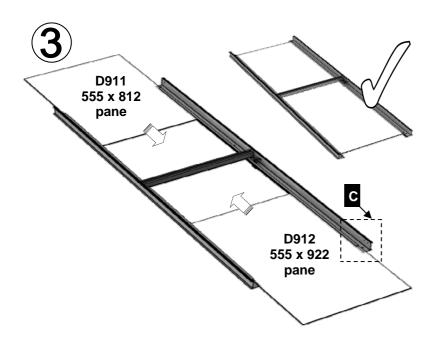



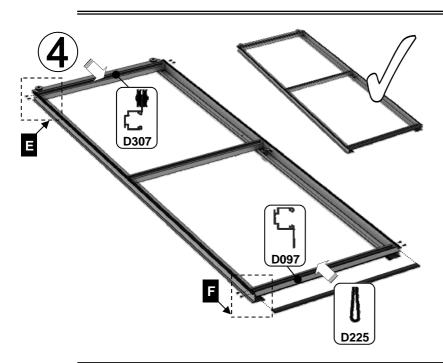





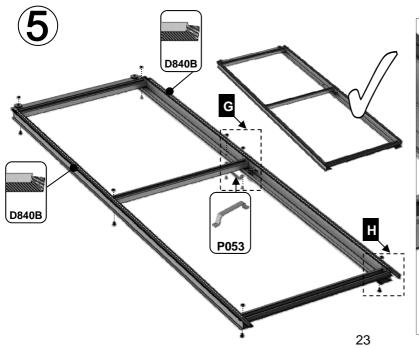








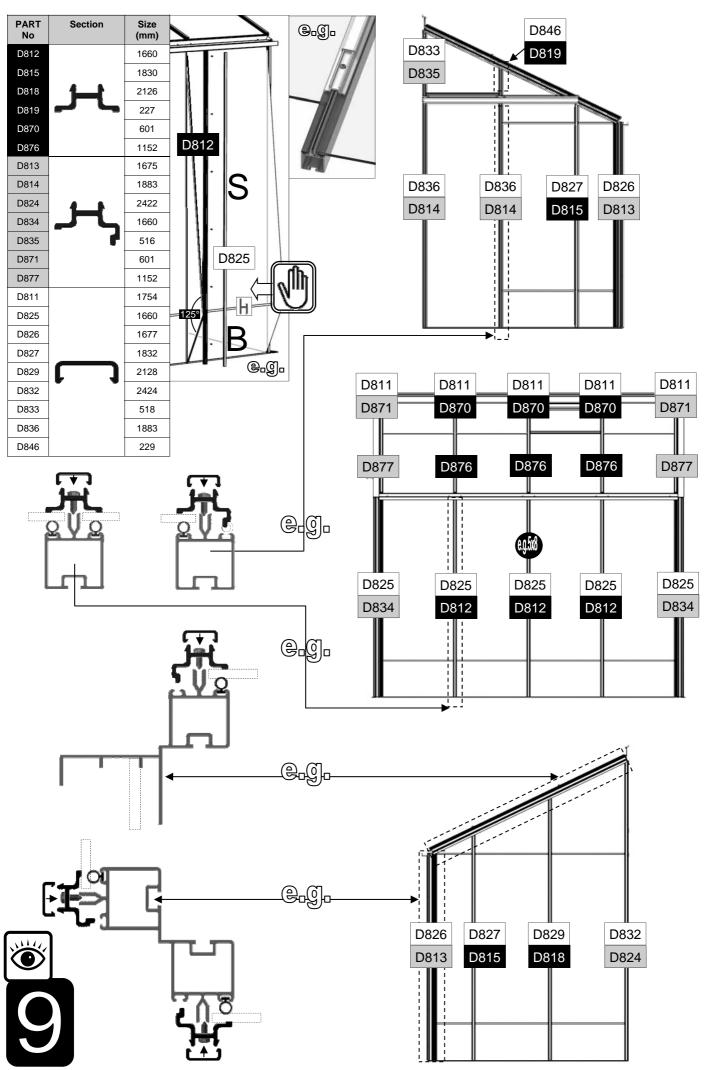

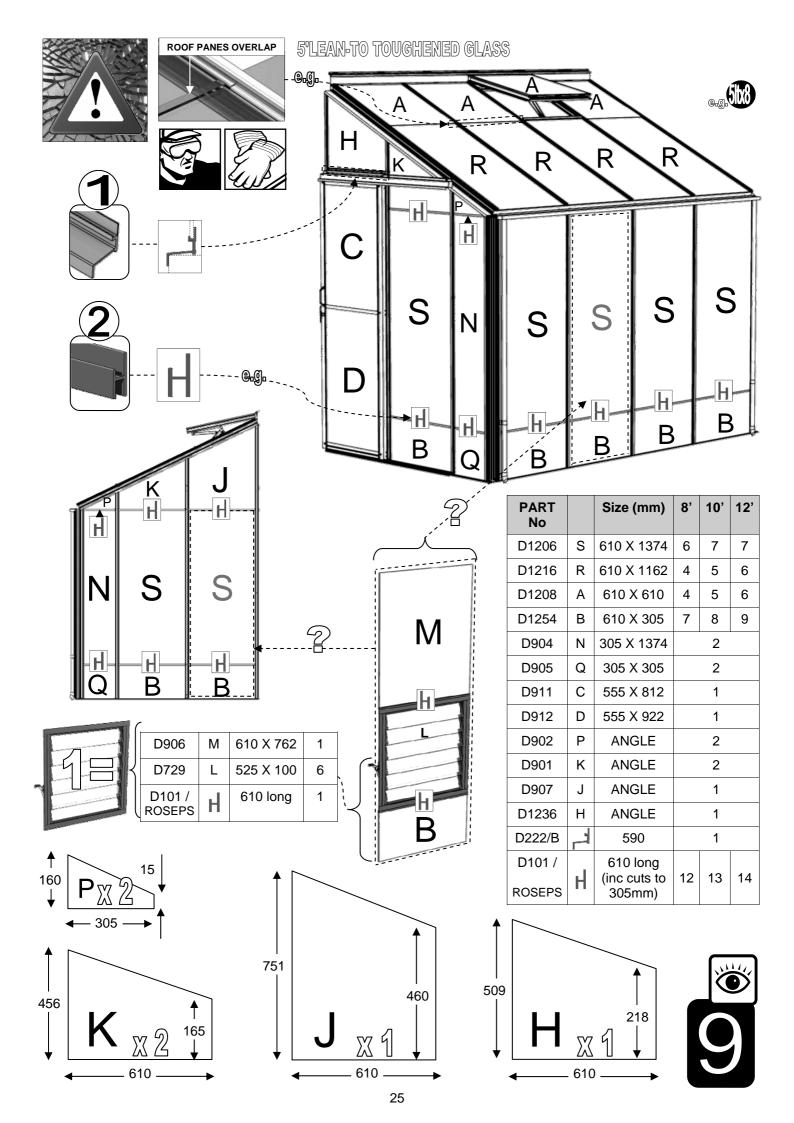

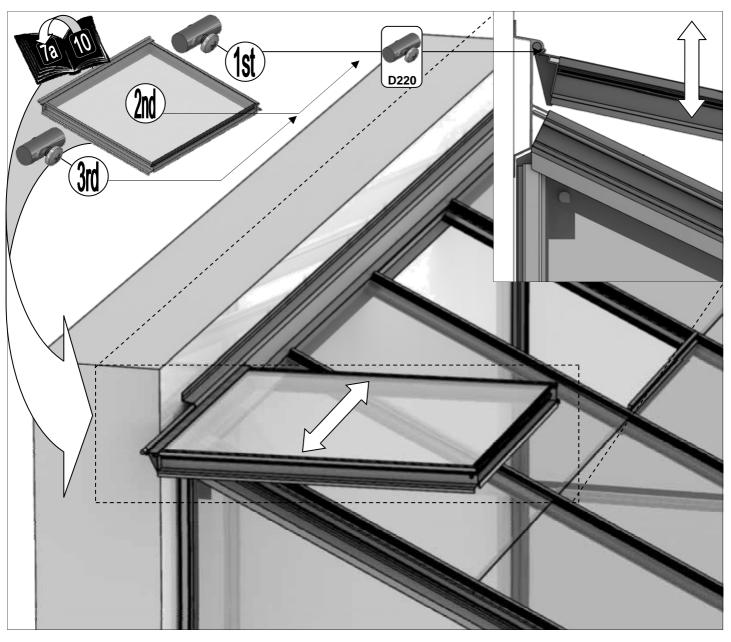

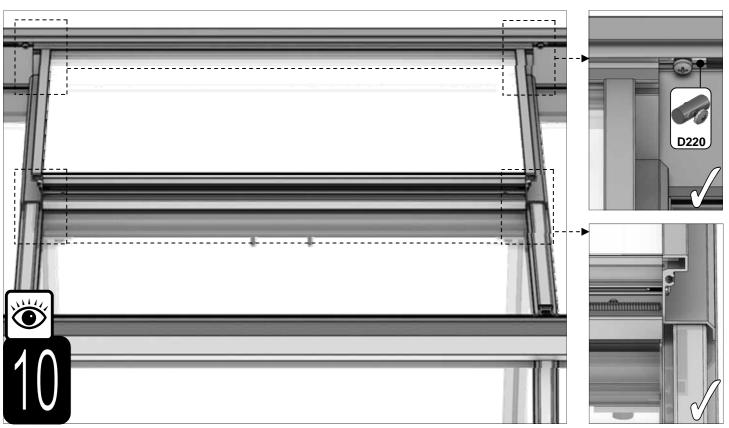


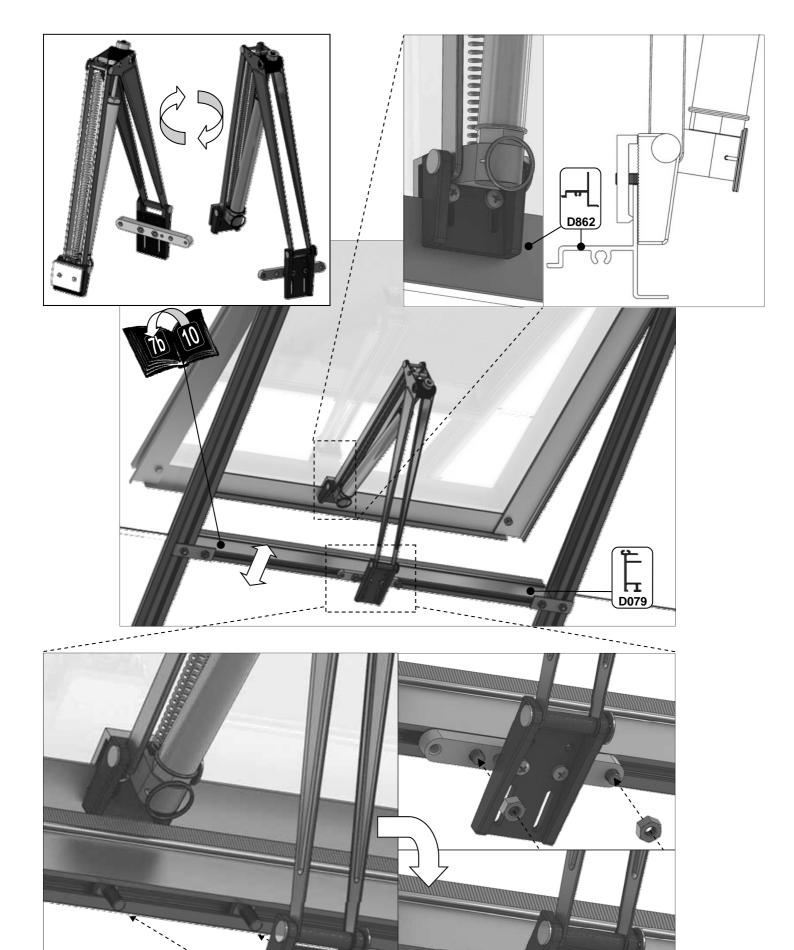






Part No		mm	Q
D864		590	1
D084	۲۲	1270	1
D083		1270	1


Part No		mm	Q
D163	0	90	2
D154			1
D845			2
SY- BOLM6X15			10
SYNUTM6			10



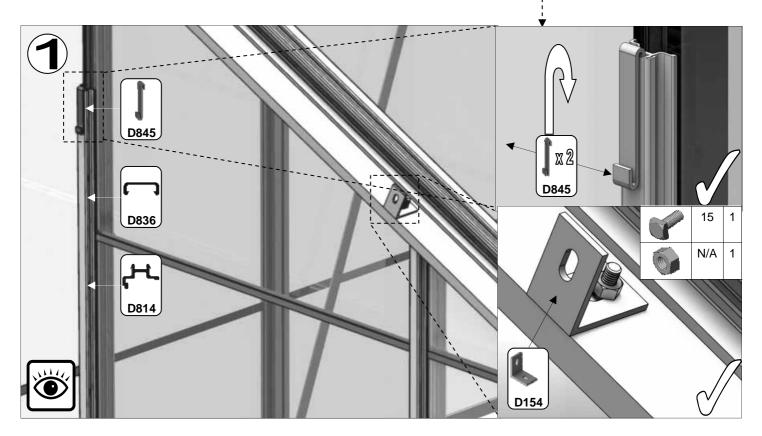


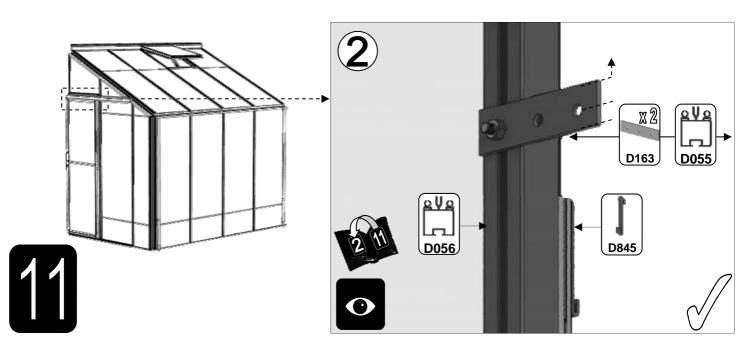


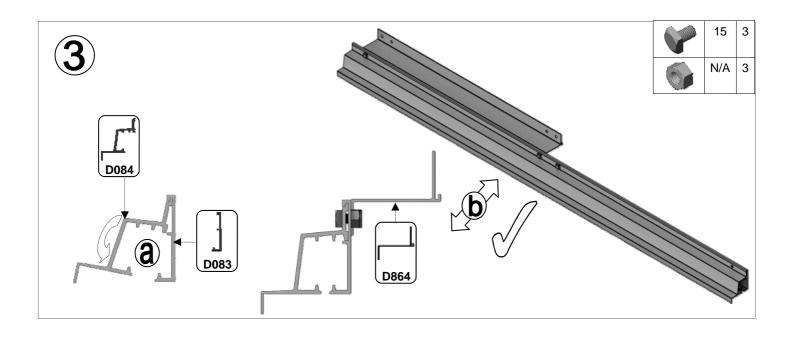


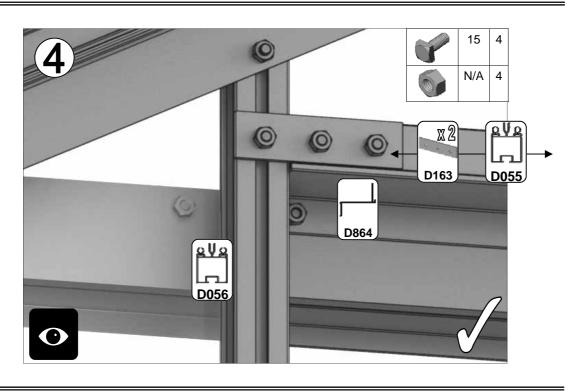




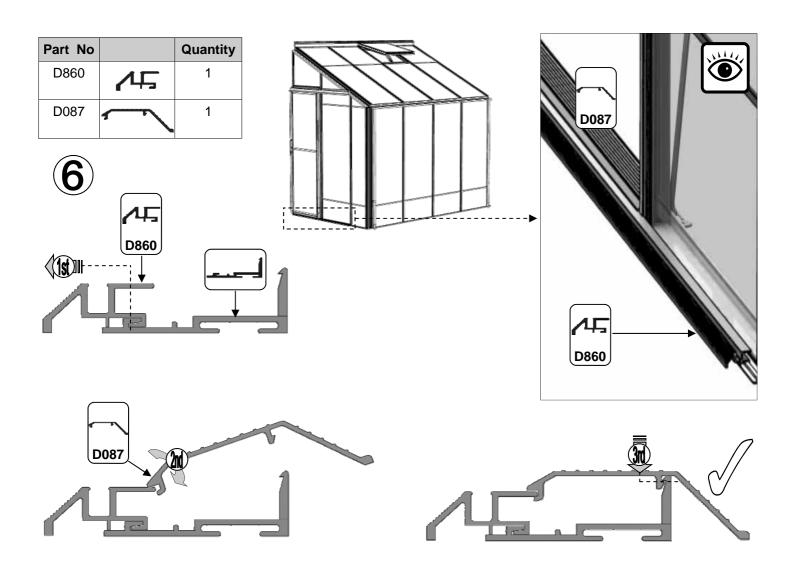


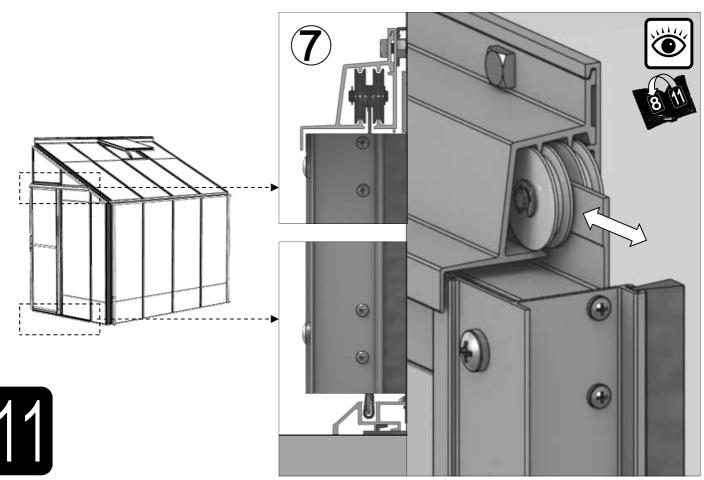


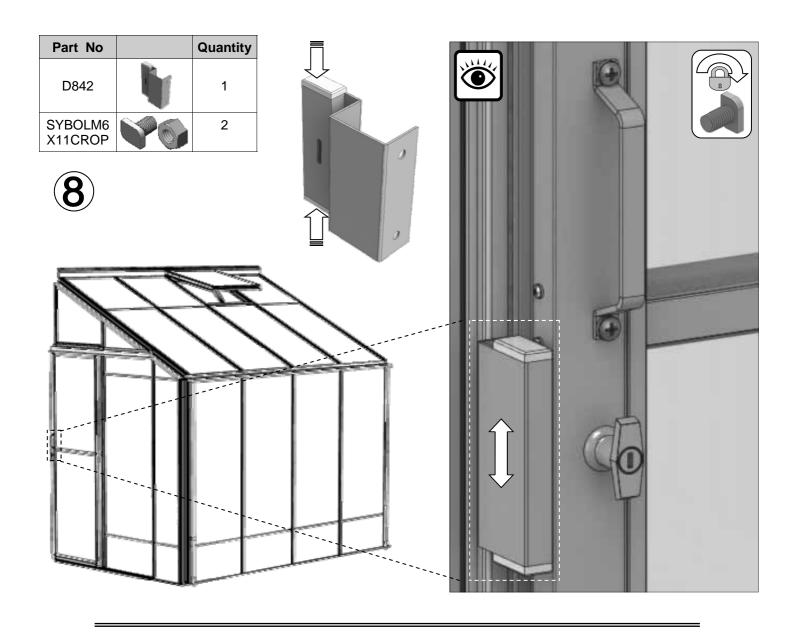

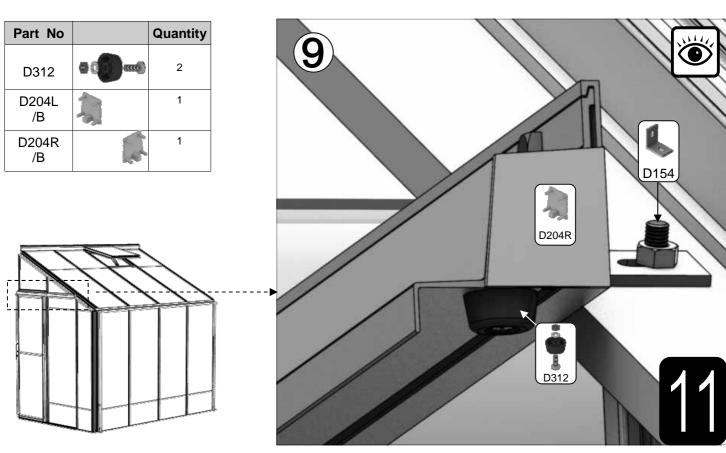




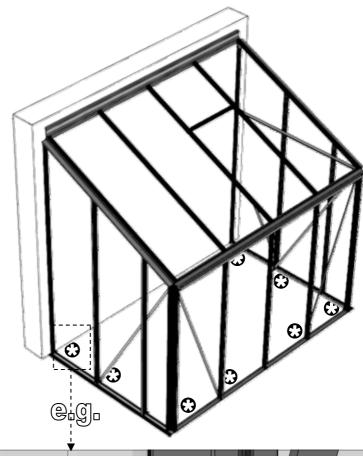

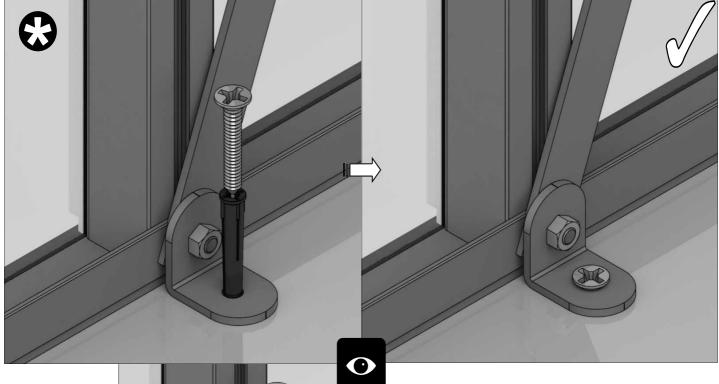









Part No		mm	Quantity
D168L		552	1
D168R (handle)	事丰	552	1
D165		612	2
D166	<u> </u>	552	2
FS6013	6	12	4




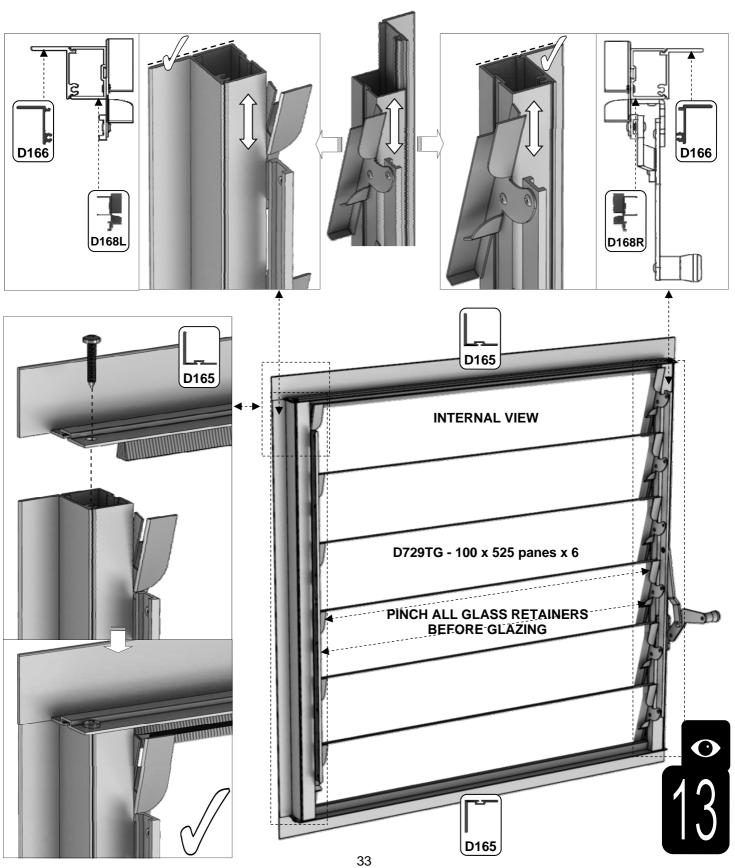

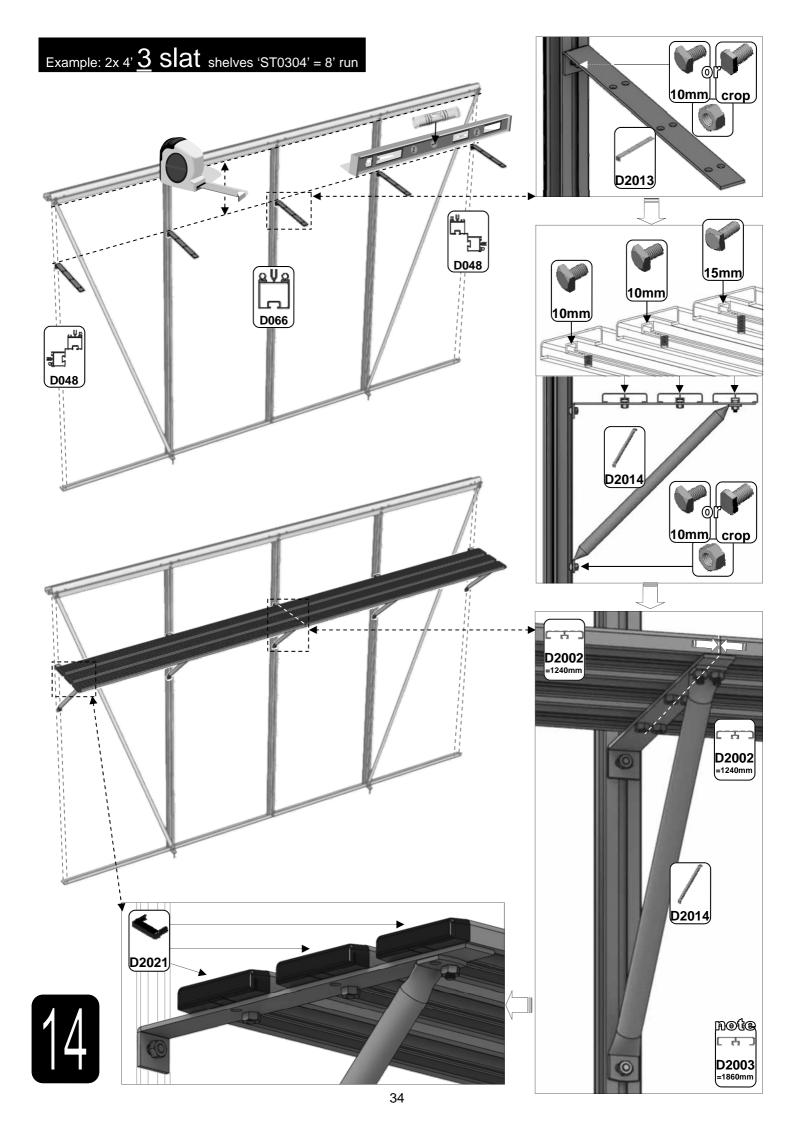


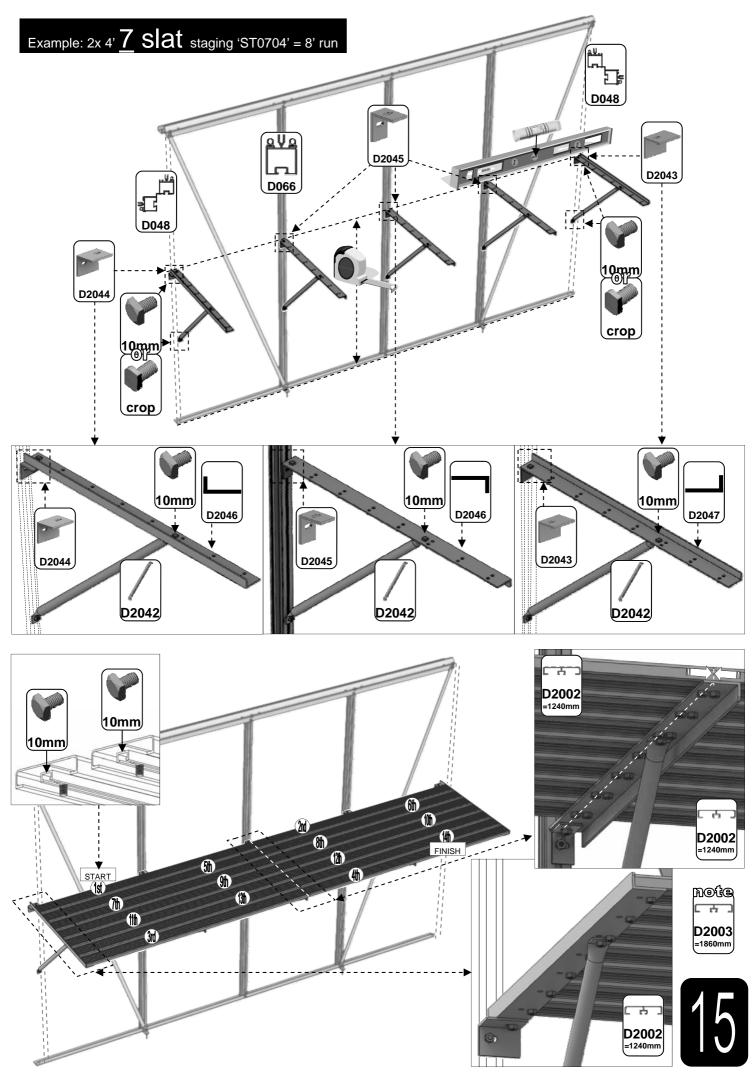


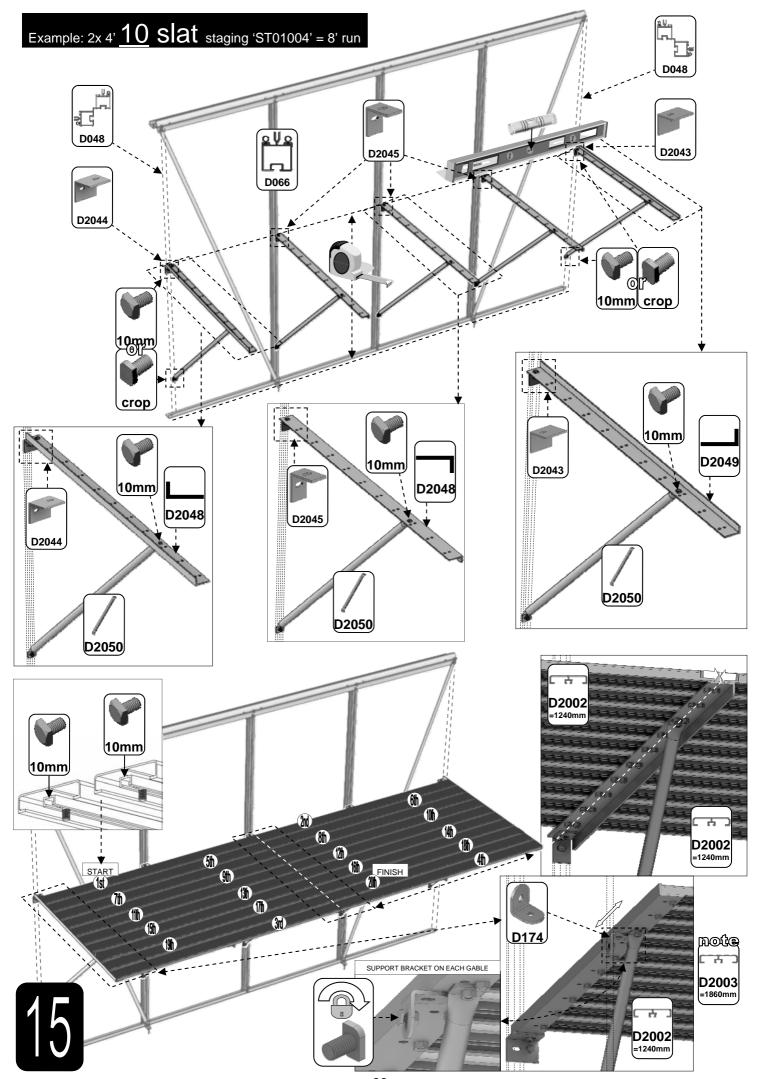


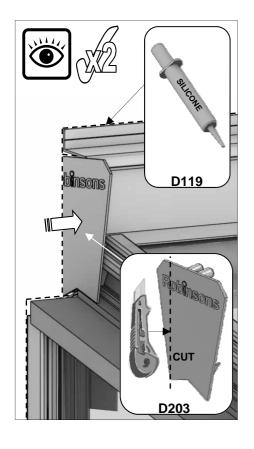




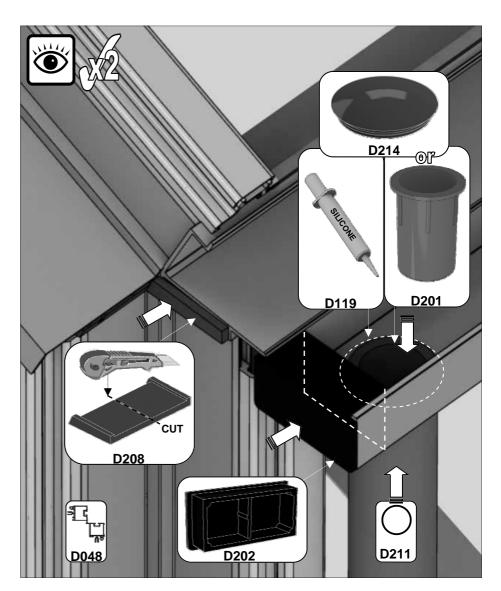

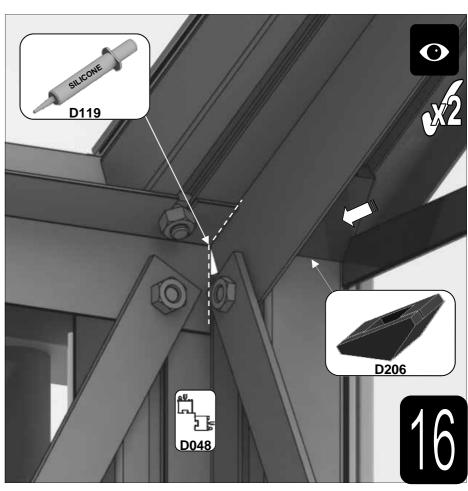

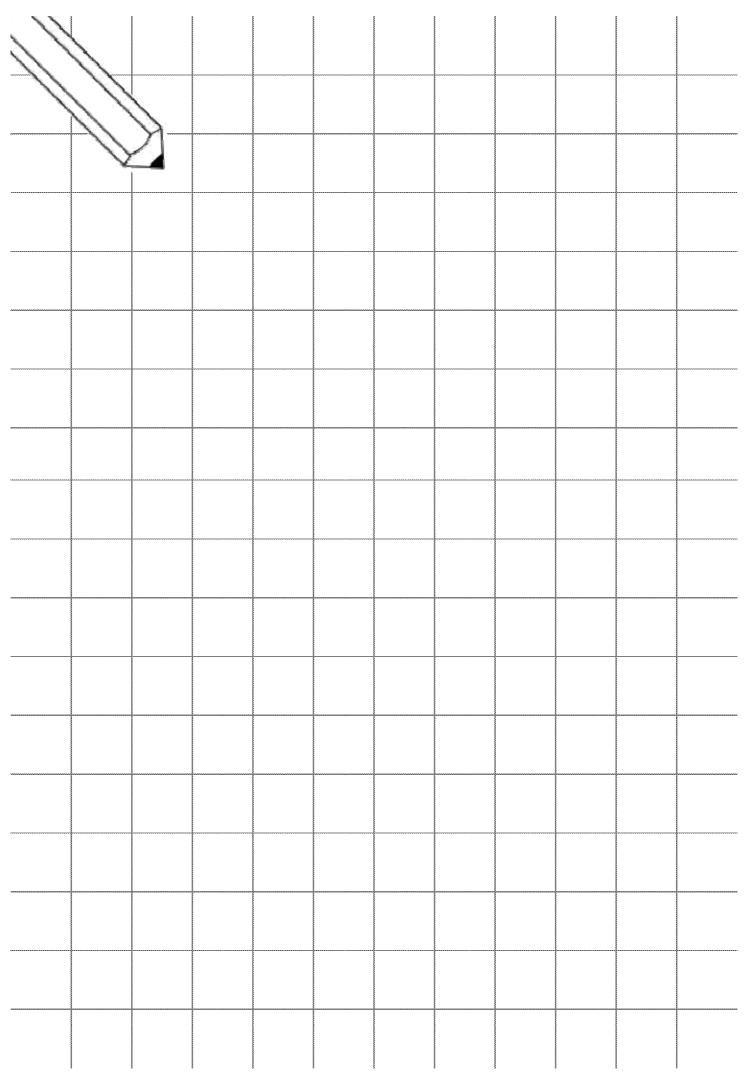

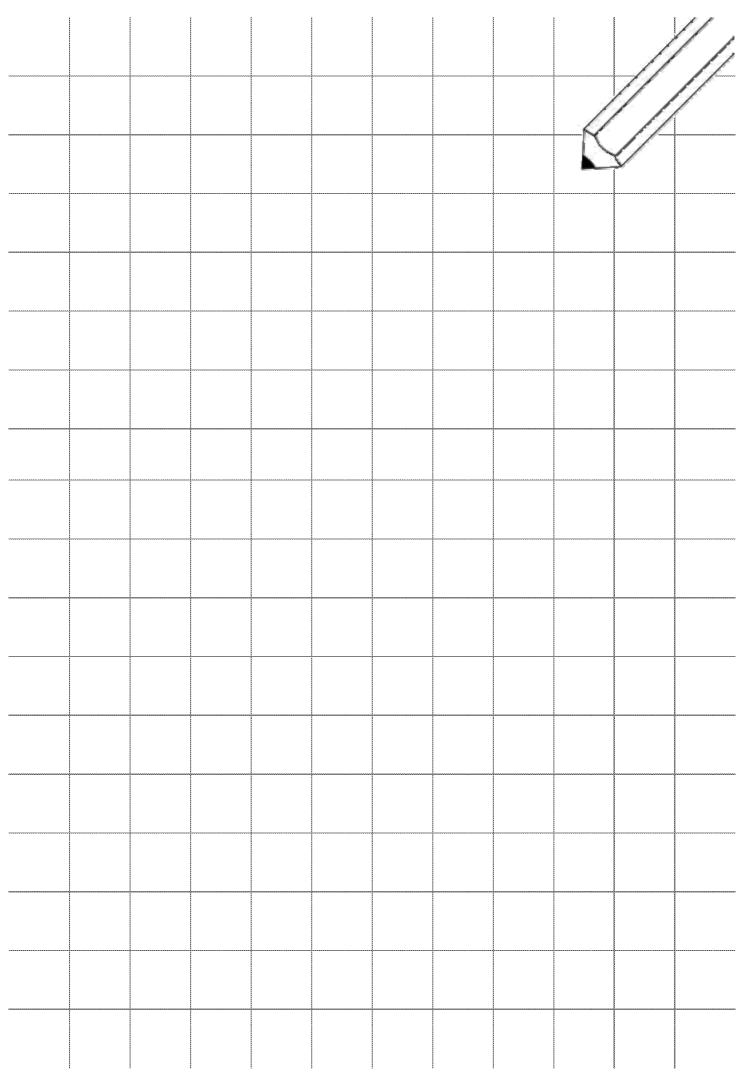

Please be aware that this is a multi-national manual, if you spot any errors or have any constructive comments regarding the manual please email james.spooner@greenhousepeople.co.uk and I will make the necessary amendments. Whilst the information contained in this booklet is accurate at the time of publication, changes in the course of Robinsons policy of improvement through development and design might not be indicated. We point out this fact to avoid any infringements of the Trade Descriptions Act and also to advise that Robinsons Greenhouses reserve the right to change specifications and materials without prior notice.

In addition any photographs of completed buildings would be most appreciated to add to our portfolio.

THIS GREENHOUSE BOX WAS PACKED BY:	DATE:



www.robinsonsgreenhouses.co.uk

To contact Robinsons Customer Services email us at <a href="mailto:sales@robinsonsgreenhouses.co.uk">sales@robinsonsgreenhouses.co.uk</a> or call us on 01782 385 409.

Our address is Robinsons Greenhouses, Unit 19 Blythe Park, Cresswell, Stoke-on-Trent, Staffordshire, ST11 9RD